

LN-R Series

Indoor & Outdoor Rental LED Display

Right-angle Splicing Rental Product Solution
Seamless Installation and Efficient Usage of Space



Light Weight



Splicing at Your Wish
(Flat/Concave&Convex/Right angle)



Modular Design




HDR Supported



Wide Viewing Angle




Single Person Operation
(Installation and Maintenance)



Leyard LN Series · Diversified Splicing

Suitable for right-angle, column and Rubik's cube installation

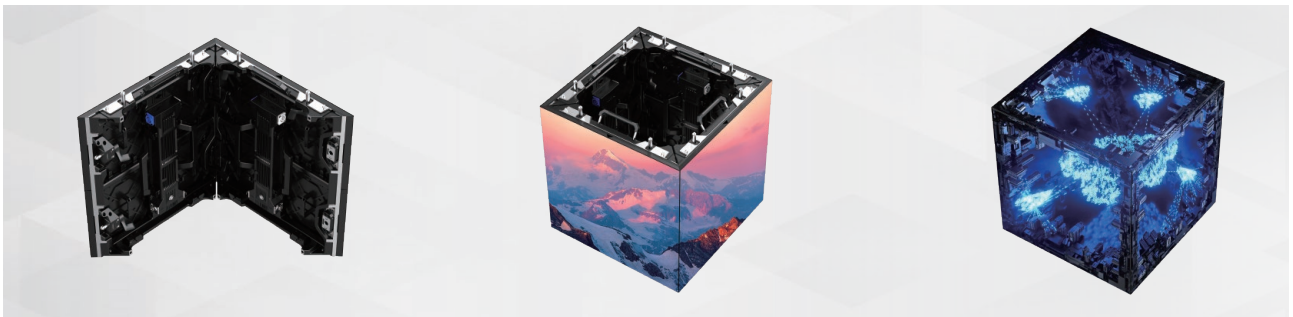

Leyard LN Series · Compatibility



SPECIFICATIONS

Item	LN1.9-R	LN2.6-R	LN2.9-R	LN3.9-R	LN2.9S-R	LN3.9S-R	LN4.8S-R
Pixel Pitch (mm)	1.953	2.604	2.976	3.906	2.976	3.906	4.808
Module Size (mm)(WxH)	250x250						
Module Composition (WxH)	2x2						
Cabinet Resolution	256x256	192x192	168x168	128x128	168x168	128x128	104x104
Cabinet Dimension (WxHxD, mm)	500x500x79						
Weight (Kg/Cabinet; Kg/m ²)	6.5; 26						
Brightness (nits)	1000				4000		
Color Temperature (K)	3000~10000 Adjustable						
Viewing Angle (°) (H/V)	160 / 140						
Contrast Ratio	5000:1						
Power Consumption (max; avg)W/m ²	600; 200						
Power Input	AC100~240V (50/60Hz)						
Frame Rate (Hz)	50&60						
Gray Scale (bit)	16						
Refresh Rate (Hz)	3840					7680	
IP Level (Front/Back)	IP50				IP65		

Remark: Above data is subject to change without prior notice



LEYARD HONG KONG INTERNATIONAL CO., LIMITED

Leyard Southern LED Industrial Park, No.6, Guanhe Rd, Longhua District, Shenzhen, China
 Email: intlmarketing@leyard.com | Website: www.leyardhk.com